TYPE	W (MM)	H (MM)	Ømin. (MM)	Ømax. (MM)
RM 15 Ex	15	15	3	11
RM 15w40 Ex	40	15	3.5	10.5
RM 20 Ex	20	20	4	14.5
RM 20w40 Ex	40	20	3.5	16.5
RM 30 Ex	30	30	10	25
RM 40 Ex	40	40	21.5	34.5
RM 40 10-32 Ex	40	40	9.5	32.5
RM 60 Ex	60	60	28	54
RM 60 24-54 Ex	60	60	24	54
RM 80 Ex	80	80	48	71
RM 90 Ex	90	90	48	71
RM 120 Ex	120	120	67.5	99
RM 60 WOC Ex	60	60	24	54
RM 80 WOC Ex	80	80	48	71
RM 90 WOC Ex	90	90	48	71
RM 120 WOC Ex	120	120	67.5	99
RM 30H90 Ex	30	90	10	25
RM 40H80 Ex	30	90	21.5	34.5

WOC = WITHOUT CORE

RM 20w40
2 CABLES/MODULE

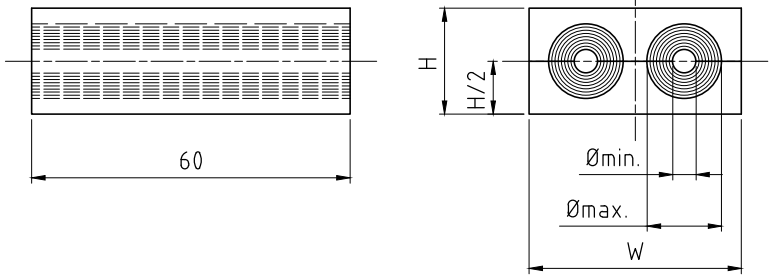

ALL TYPES EXCEPT
RM 20w40
RM 15w40
1 CABLE/MODULE

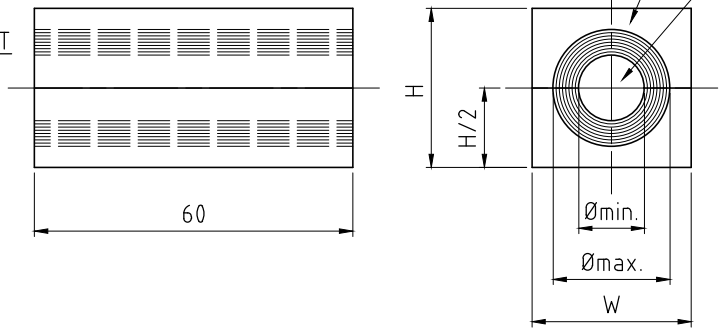

RM 15w40
3 CABLES/MODULE

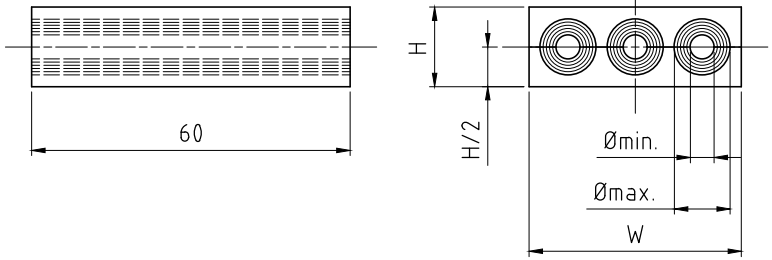

Item	Qty	Designation	Specification	Net Weight
2	-	CORE	ROXYLON	-
1	-	PROFILE	ROXYLON	-

General tolerance ISO 2768-1/2-m/K EN ISO 13920-BF | Welded details EN ISO 5817-B EN ISO 10042-B | General surface roughness, Ra 12,5

Designed by: se-marprz | Created Date: 2009-03-10 | Latest save date: 2018-05-04 | Format: A3 | Scale: 1:1 | Sheet no | Tot Weight: -

Roxtec
www.roxtec.com

Title: RM Ex MODULES ASSEMBLY

Projection method

Restricted due to: Information drawing

Drawing number: S1016608

Rev: C

Rev	Type of revision	Date	Sign
C	RANGE FOR RM 40H80 Ex CORRECTED.	2018-05-04	se-tontor

All rights reserved. Unauthorized reproduction, use or disclosure to third parties is strictly forbidden.

洛克赛克保留所有权利。未经授权严禁复制，使用以及向第三方泄漏。